
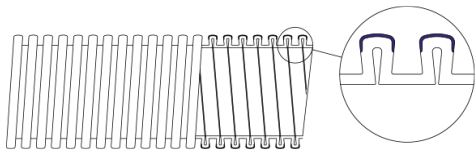


# T3200

Flexible Ducting

Plastiflex || LDPE/EVA Vacuum Ducting

Resistivity <math><10^{10}</math> Ohms

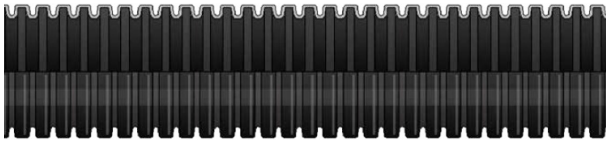

### Description

A lightweight, antistatic ducting with excellent dust rejection capabilities. Antistatic to  $R < 10^{10}$  Ohms.

### Applications

Designed for a multitude of applications which have a moderate problem with static electricity. Also suitable for carpet cleaning and commercial vacuum cleaners.

### Construction

Made from an antistatic mix of high quality LDPE and EVA

### Key Features

- Slightly conductive (1012 up to 1013CE@/m)
- Resistant to continuous vibrations and movements
- Low profile allows for outstanding flexibility
- It is a shape-memory polymer that can resist being crushed

### Standards & Specifications

RoHS compliant



### Temperature Range

-40°C to +60°C

Specification								
Size	ID (mm)	OD (mm)	Wall (mm)	Bend Radius (mm)	WP (bar)	Vacuum (WS/mmWG)	Weight (kg/m)	Product Code
1"	25.4	33.6	4.10	30	0.6	1	0.15	T3200-025
1 ¼"	31.8	40.7	4.45	35	0.5	1	0.25	T3200-032
1 ½"	38.1	48.8	5.35	45	0.5	1	0.35	T3200-038
2"	50.8	61.5	5.35	55	0.4	1	0.46	T3200-045
2 ½"	63.5	75.0	5.75	60	0.4	1	0.55	T3200-052

### Notes

Available in 15m lengths

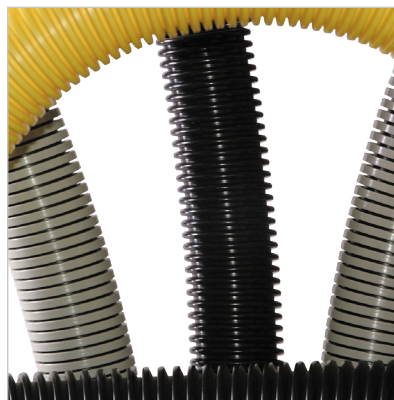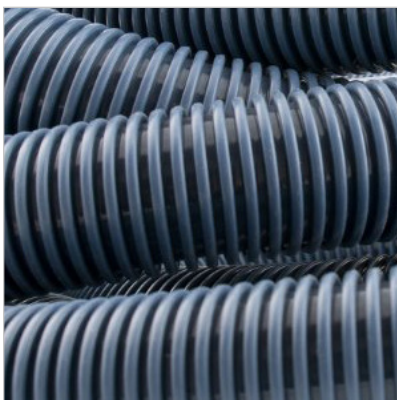

Flextech Hose Solutions Ltd.  
945-946 Yeovil Road  
Trading Estate, Slough  
Berkshire, SL1 4NH  
United Kingdom

Office: +44 (0) 1753 570 099  
Accounts: +44 (0) 1753 378 984  
Fax: +44 (0) 1753 550 011  
Email: sales@flextechhose.co.uk  
Website: flextechhose.co.uk

Company Registration Number: GB 7056556  
VAT Number: GB 212764327  
D-U-N-S: 216259232

