
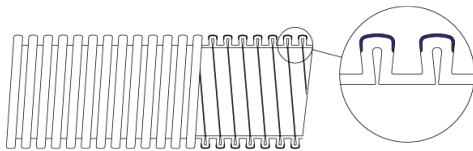


T3200G

Flexible Ducting

Plastiflex || LDPE/EVA Vacuum Ducting

Resistivity <math><10^8</math> Ohms

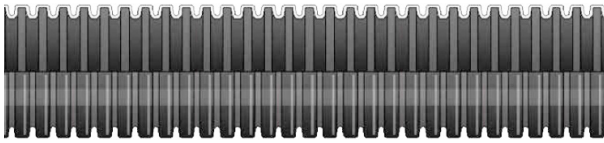

Description

A lightweight, antistatic ducting with excellent dust rejection capabilities. Antistatic to $R < 10^8$ Ohms.

Applications

Designed for a multitude of applications which have a moderate problem with static electricity. Also suitable for carpet cleaning and commercial vacuum cleaners.

Construction

Made from an antistatic mix of high quality LDPE and EVA

Key Features

- Slightly conductive (1012 up to 1013CE@/m)
- Resistant to continuous vibrations and movements
- Low profile allows for outstanding flexibility
- It is a shape-memory polymer that can resist being crushed

Standards & Specifications

RoHS compliant


Temperature Range

-40°C to +60°C

Specification								
Size	ID (mm)	OD (mm)	Wall (mm)	Bend Radius (mm)	WP (bar)	Vacuum (WS/mmWG)	Weight (kg/m)	Product Code
1"	25.4	33.6	4.10	30	0.6	1	0.15	T3200G-025
1 ¼"	31.8	40.7	4.45	35	0.5	1	0.25	T3200G-032
1 ½"	38.1	48.8	5.35	45	0.5	1	0.35	T3200G-038
2"	50.8	61.5	5.35	55	0.4	1	0.46	T3200G-045
2 ½"	63.5	75.0	5.75	60	0.4	1	0.55	T3200G-052

Notes

Available in 15m lengths

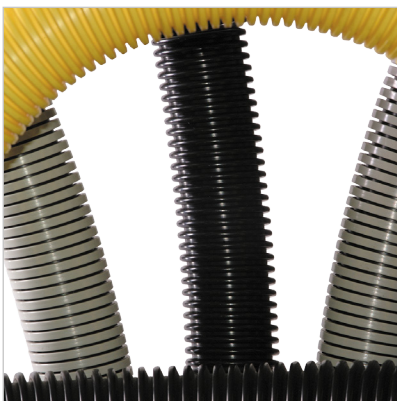

Flextech Hose Solutions Ltd.
945-946 Yeovil Road
Trading Estate, Slough
Berkshire, SL1 4NH
United Kingdom

Office: +44 (0) 1753 570 099
Accounts: +44 (0) 1753 378 984
Fax: +44 (0) 1753 550 011
Email: sales@flextechhose.co.uk
Website: flextechhose.co.uk

Company Registration Number: GB 7056556
VAT Number: GB 212764327
D-U-N-S: 216259232

