
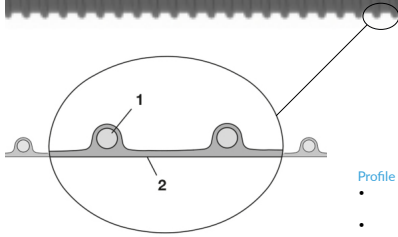


## Superflex || PVC Ducting

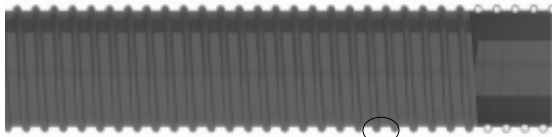

**Profile**

- White, rigid crush-resistant, anti-shock, PVC, helical spiral
- Smoothbore PVC layer

### Key Features

- Lightweight
- Non-toxic
- Crush Resistant
- Highly flexible/good bend radius
- Good chemical resistance

### Standards & Specifications

Meets REACH regulation (1907/2006), RoHS 2011/65/EU Directive, TRB S 2153

### Description

A grey, lightweight, extremely flexible PVC ducting.

### Applications

Light duty applications for low pressure gravity feed and suction duties for the handling of industrial ventilation/airflow systems, cold air, dust, fumes, gases, liquids, plastic granules, domestic/industrial vacuuming, low pressure handling of warm and cold air, dust, fumes, heating and ventilation systems, light abrasive materials and powders, light materials such as fibres, pellets and fabric cuttings.

### Construction

#### Liner

Smoothbore PVC layer

#### Reinforcement

White, rigid crush-resistant, anti-shock, PVC, helical spiral

#### Cover

Corrugated outer PVC layer

### Temperature Range

-15°C to +65°C

Specification								
Size	ID (mm)	OD (mm)	Wall (mm)	Bend Radius (mm)	WP (bar)	Vacuum (mtH2O)	Weight (kg/m)	Product Code
1"	25	30.0	0.8	30		2.5	0.15	T3700G-025
1 ¼"	32	37.6	0.8	35		2.0	0.20	T3700G-032
1 ½"	38	44.0	0.8	45		2.0	0.25	T3700G-038
-	40	46.0	0.8	50		2.0	0.27	T3700G-040
1 ¾"	45	51.2	0.8	55		2.0	0.34	T3700G-045
2"	51	58.0	0.8	60		2.0	0.41	T3700G-051
2 ½"	63.5	70.7	0.8	70		2.0	0.50	T3700G-063
3"	76	83.6	0.9	100		1.6	0.61	T3700G-076
-	80	88.6	0.9	110		1.5	0.72	T3700G-080
4"	102	110.6	0.9	140		1.5	0.94	T3700G-102
5"	127	137.0	1.0	170		1.3	1.23	T3700G-127
6"	152	162.6	1.1	180		1.0	1.54	T3700G-152
-	160	172.0	1.1	190		0.8	1.72	T3700G-160
7"	180	192.0	1.1	300		0.7	1.94	T3700G-180
8"	200	212.0	1.1	400		0.4	2.13	T3700G-250
10"	250	263.6	1.2	450		0.4	3.21	T3700G-300
12"	300	313.8	1.2	1000		0.3	3.89	

Flextech Hose Solutions Ltd.  
945-946 Yeovil Road  
Trading Estate, Slough  
Berkshire, SL1 4NH  
United Kingdom

Office: +44 (0) 1753 570 099  
Accounts: +44 (0) 1753 378 984  
Fax: +44 (0) 1753 550 011  
Email: sales@flextechhose.co.uk  
Website: flextechhose.co.uk

Company Registration Number: GB 7056556  
VAT Number: GB 212764327  
D-U-N-S: 216259232

