


T3850

Flexible Ducting

Vacuflex || Lightweight PVC Ducting

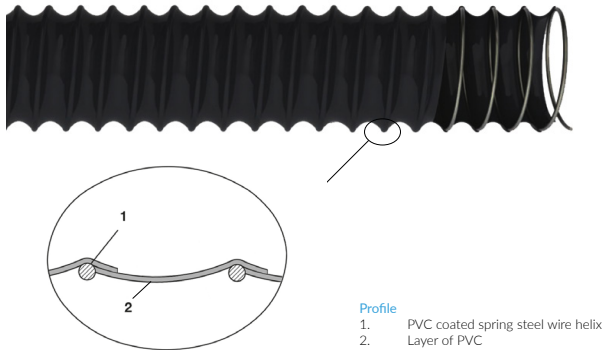

Key Features

- Highly flexible
- Can be used in confined spaces
- Cross section is maintained even when highly flexed
- Extremely durable

Standards & Specifications

Meets REACH regulation (1907/2006)

Description

A black, lightweight PVC ducting

Applications

Ideally suited for low pressure handling of warm and cold air, dust, fumes, heating and ventilation systems together with light abrasive materials and powders.

Construction

Liner

Flexible PVC

Reinforcement

White, PVC coated spring steel wire helix

Cover

Flexible PVC

Temperature Range

-10°C to +55°C

Specification								
Size	ID (mm)	OD (mm)	Wall (mm)	Bend Radius (mm)	WP (bar)	Vacuum (H2O)	Weight (kg/m)	Product Code
1"	25	30	0.5	13	1.5	2	0.15	T3850-025
1 ¼"	32	37	0.5	16	1.3	2	0.15	T3850-032
1 ½"	38	43	0.5	19	1.2	2	0.20	T3850-038
1 ¾"	45	50	0.5	23	1.1	1	0.25	T3850-045
2"	51	56	0.5	26	1.1	1	0.30	T3850-051
2 ¼"	57	62	0.5	29	1.0	1	0.32	T3850-057
2 ½"	63	68	0.5	32	0.8	1	0.35	T3850-063
2 ¾"	70	75	0.5	35	0.8	1	0.52	T3850-070
3"	76	81	0.5	38	0.6	1	0.60	T3850-076
3 ¼"	82	87	0.5	41	0.5	1	0.65	T3850-082
3 ½"	89	94	0.5	45	0.5	1	0.70	T3850-089
4"	102	107	0.5	51	0.4	1	0.75	T3850-102
4 ½"	115	120	0.5	58	0.2	0	0.80	T3850-115

Flextech Hose Solutions Ltd.

945-946 Yeovil Road
Trading Estate, Slough
Berkshire, SL1 4NH
United Kingdom

Office: +44 (0) 1753 570 099

Accounts: +44 (0) 1753 378 984

Fax: +44 (0) 1753 550 011

Email: sales@flextechhose.co.uk

Website: flextechhose.co.uk

Company Registration Number: GB 7056556

VAT Number: GB 212764327

D-U-N-S: 216259232

