


T5715-LHD

Rubber Hose

Dairyflex® Lite Heavy Duty Food & Dairy Suction & Delivery Hose

Food & Beverage Applications

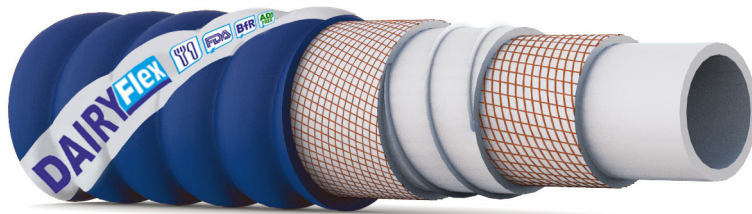

Description

A 16 bar, very flexible, light handling, food quality, suction and delivery hose for fatty foods and dairy produce. Higher pressure alternative to T5715L.

Construction

Liner

Smooth, white, NBR rubber compound. This food quality liner is odourless and taste free.

Reinforcement/s

High strength synthetic plies with steel wire spirals.

Cover

Corrugated, blue, cloth impression NBR rubber which is resistant to ozone, abrasion and weathering.

Standards & Specifications

FDA 21.CFR.177.2600, BfR D.M.21/03/73, ADI Free, CE 1935/2004

Temperature Range

-30°C to +100°C (Max 20 mins +130°C for sterilisation)

Specification									
Size	ID (mm)	OD (mm)	Wall (mm)	Bend Radius (mm)	WP (bar)	BP (bar)	Vacuum (bar)	Weight (g/m)	Product Code
1"	25	37	6.00	70	16	48	0.9	0.79	5715-LHD-025
2"	51	65.5	7.25	100	16	48	0.9	1.90	5715-LHD-051
3"	76	95	10.00	150	16	48	0.9	3.35	5715-LHD-076